




GLADIATOR™ FG

PREMIUM HOSE. EXCELLENT FLOW,
EVEN AT LOW PRESSURE.

Gladiator™ is a premier hose with a polyester outside jacket that encompasses a very durable nitrile rubber thru-the-weave inside liner. Built to last, this rugged hose is constructed with incredible strength and long-lasting performance in mind. The Gladiator™ performs well at high or low pressures, has a smooth and enhanced waterway for better flows, and less kinking than other products on the market.

FEATURES

- Premium quality, outside jacket with a nitrile rubber thru-the-weave inner liner construction. NO ADHESIVE IS USED. The lining will never delaminate.
- Optional Dura-Cote™ treatment.
- Remains flexible at temperatures as low as -40°F (-40°C) and highly resistant to ozone and oxidation, and most chemicals and petrochemicals.
- Kink resistance exceeds that of lightweight jacketed hose.
- Suitable for use with CAFS and foam solutions.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.

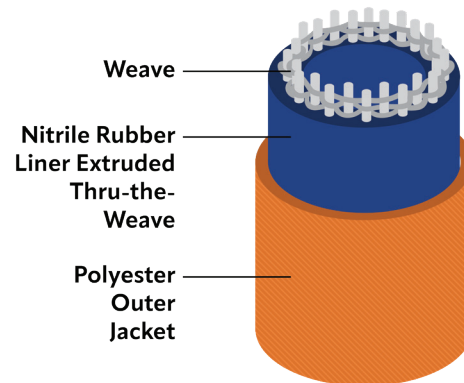


HOSE COLORS



GLADIATOR™ FG

PREMIUM HOSE. EXCELLENT FLOW, EVEN AT LOW PRESSURE.

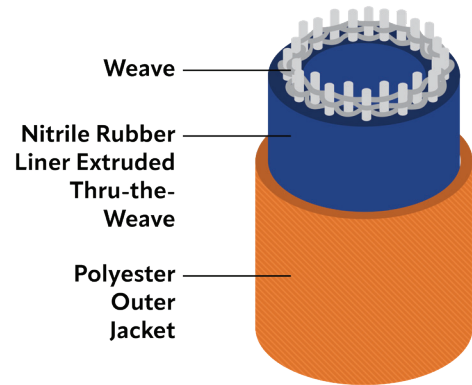

HOSE COLORS



STRIPE COLORS



TECHNICAL DATA & INFORMATION

Model	Gladiator™
Basic Construction	Polyester outer jacket, extruded thru-the-weave nitrile liner.
Application	Attack, Low PSI, CAFS
Colors:	Yellow, Red, Blue, Orange, Green, White (coated), White (uncoated)
Stripe Colors:	Yellow, Red, Blue, Black, Green
Temperature Range	-40° F - 200° F
Testing Pressures:	
Service	500 psi
Proof	1000 psi
Burst	1500 psi

GLADIATOR™ FG

PREMIUM HOSE. EXCELLENT FLOW, EVEN AT LOW PRESSURE.

TECHNICAL DATA & INFORMATION										
NOMINAL SIZE	INTERNAL/OUTSIDE DIAMETER				WEIGHT					
	Dry ID	Charged ID at 50 psi	Charged ID at 150 psi	Charged OD at 150 psi	Water Pickup Weight*	Dry (lbs./50' coupled)	Charged at 50 psi (lbs./50' coupled)	# of Gallons/50'	Charged at 150 psi (lbs./50' coupled)	# of Gallons/50'
1-1/2"	-	Pending	Pending	Pending	Pending	Pending	Pending	Pending	Pending	Pending
1-3/4"	1.908"	2.014	2.053	2.312	3.2 LBS	22	90.62	8.26	93.29	8.58
2"	2.004"	2.148	2.209	2.465	3.2 LBS	25	103.11	9.411	107.61	9.95
2-1/2"	2.503"	2.716	2.783	2.967	4.4 LBS	35	159.87	15.04	166.06	15.79

TECHNICAL DATA & INFORMATION						
NOMINAL SIZE	DOORWAY KINK	ABRASION RESISTANCE		PACKABILITY		
		# of Taber Abrasion Cycles (H-22 wheel)		Flat Width	Edge Thickness	180° Bend Thickness
1-1/2"	18" / 50psi	57,000+		Pending	Pending	Pending
1-3/4"	24" / 50psi	57,000+		3.34"	.587"	1.249"
2"	24" / 50psi	57,000+		3.46"	.56"	1.0"
2-1/2"	30" / 50psi	57,000+		4.21"	.74"	1"

GLADIATOR™ FG

PREMIUM HOSE. EXCELLENT FLOW, EVEN AT LOW PRESSURE.

TECHNICAL DATA & INFORMATION										
NOMINAL SIZE	RADIANT HEAT TEST RESULTS					CONDUCTIVE HEAT TEST RESULTS				
	Radiant Heat Exposure	Exposure Duration*	Average Leakage Rate at 150 psi	Max Leakage Rate at 150 psi	UL 19 Heat Resistance Type	Conductive Heat Exposure	Exposure Duration*	Average Leakage Rate at 150 psi	Max Leakage Rate at 150 psi	UL 19 Heat Resistance Type
1-1/2"	30 kw/m2	Pending	Pending	Pending	-	Steel block at 752°F	Pending	Pending	Pending	-
1-3/4"	30 kw/m2	11M / 48S (Red)	1 GPM	N/A	Type 2	Steel block at 752°F	1M / 28S	1 GPM	N/A	Type 2
2"	30 kw/m2	Available upon Request			-	Steel block at 752°F	Available upon Request			-
2-1/2"	30 kw/m2	3M / 4S (Orange)	2.5 GPM	N/A	Type 2	Steel block at 752°F	1M / 18S	2 GPM	N/A	Type 2

*The results from the radiant heat test are based on controlled laboratory testing and do not represent actual conditions encountered during firefighting. These results are intended to be used as a baseline for hose comparison purposes only and are not indicative of specific field performance. Several factors can influence hose performance relative to radiant heat, please see Guidance for Lined Fire Hose and Hose Assemblies, UL 19G for further information on these results.

*The results from the conductive heat test are based on controlled laboratory testing and do not represent actual conditions encountered during firefighting. These results are intended to be used as a baseline for hose comparison purposes only and are not indicative of specific field performance. Several factors can influence hose performance relative to conductive heat, please see Guidance for Lined Fire Hose and Hose Assemblies, UL 19G for further information on these results.

*10-year warranty, 2-year all hazard warranty.

*MIL Std 24606 used for water pickup weight.

*1-1/2", 1 3/4", 2", and 2-1/2" are UL/ULC Pending.

*Potable water approved: No

*Quality Management System Certification: ISO 9001:2015 Registration # 11-R1045