




# IRRIGATION HOSE™

## EXTRUDED POLYURETHANE HOSE

Snap-tite's IR™ is the leading irrigation line in the field. Built to last, the rugged IR™ hose is constructed of 100% high tenacity yarn, extruded with thru-the-weave polyurethane for incredible strength and long-lasting performance. The liner and cover meet minimum 3,000 psi tensile strength. IR™ is capable of withstanding exposure to most hydrocarbons, gasoline, oils, alkalis and grease with no effect on performance. It is built for fast deployment and retrieval, saving time and money. IR™ is portable, easy to store and has a long service life, delivering performance and exceptional value.

### FEATURES

- Super tough and ozone-resistant, showing no signs of cracking of the inner liner or cover when subjected to testing in accordance with ATSM D1149-64, 100 PPHM/122°F/70 hours.
- Hose remains flexible at temperatures as low as -60°F (-51°C) and is five times more abrasion resistant than conventional rubber hose.
- Designed for maximum service life and low operating cost for greater value.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.

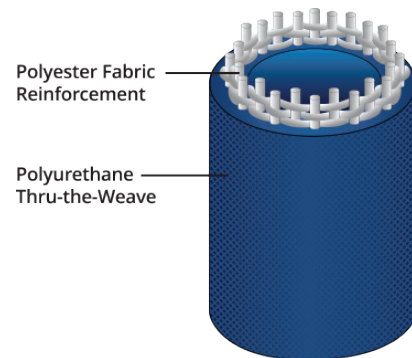

### HOSE COLORS

Blue



# IRRIGATION HOSE™

## EXTRUDED POLYURETHANE HOSE



### HOSE COLORS

Blue



### SNAP-TITE HOSE TECHNICAL DATA & INFORMATION

<b>Model</b>	Irrigation Hose™
<b>Basic Construction</b>	Polyurethane thru-the-weave extrusion
<b>Application</b>	Agriculture
<b>Colors:</b>	Blue
<b>Temperature Range</b>	-60° F - 180° F

### TECHNICAL DATA & INFORMATION

NOMINAL SIZE	WALL THICKNESS	TESTING PRESSURES (PSI)			WEIGHT (LBS/FT)	ABRASION RESISTANCE # of Taber Abrasion Cycles (H-22 wheel)
		Service	Proof	Burst		
3"	0.130"	200 psi	400 psi	700 psi	0.6	500,000+
4"	0.130"	200 psi	400 psi	500 psi	0.8	500,000+
4-1/2"	0.130"	200 psi	400 psi	500 psi	0.94	500,000+

\*1-year warranty.

\*Potable water approved: Yes

\*Quality Management System Certification: ISO 9001:2015 Registration # 11-R1045