




SNAP-TITE™™

EXTRUDED POLYURETHANE HOSE

From fuel transfer to potable water, the TM™ hose is engineered to military-grade quality standards to perform in the field. Smarter by design, its 100% high tenacity yarn, extruded with thru-the-weave polyurethane creates a strong but lightweight hose. The liner and cover rate at minimum 3,000 psi tensile strength. TM™ is also available with an optional encapsulated anti-static discharge wire.

FEATURES

- Super tough and ozone-resistant, showing no signs of cracking of the inner liner or cover when subjected to testing in accordance with ATSM D1149-64, 100 PPHM/122°F/70 hours.
- Hose can withstand exposure to most hydro-carbons, gasoline, oils, alkalis, and grease.
- Hose remains flexible at temperatures as low as -60°F (-51°C) and is five times more abrasion resistant than conventional rubber hose.
- Compatible with the following fuels: MIL-DTL-83133 (JP-8) (NATO F-34), MIL-DTL-5624 (JP-5) (NATO F-44), A-A-52557 (Diesel-military, including NATO F-54), ASTM D 975 (Diesel-US commercial), MIL-DTL-83133 (NATO F-35), ASTM D 1655 (Jet-A-1), and AFLLLP-3747 (NATO F-24).
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.

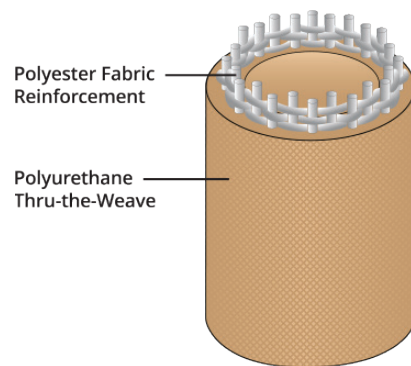


HOSE COLORS

Tan



SNAP-TITE™™

EXTRUDED POLYURETHANE HOSE

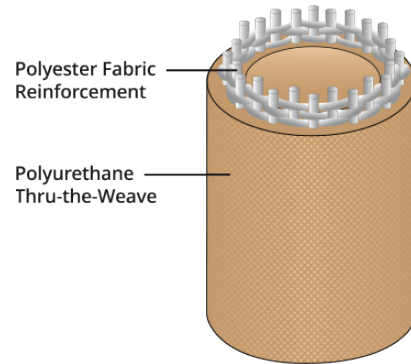

HOSE COLORS

Tan



SNAP-TITE HOSE TECHNICAL DATA & INFORMATION	
Model	TM™
Basic Construction	High tenacity yarn extruded with thru-the-weave polyurethane.
Application	Supply
Colors:	Tan
Temperature Range	-60° F - 180° F

TECHNICAL DATA & INFORMATION					
NOMINAL SIZE	WALL THICKNESS	TESTING PRESSURES (PSI)			WEIGHT (LBS/FT)
		Service	Proof	Burst	
2"	0.100"	300 psi	600 psi	900 psi	0.387
3"	0.130"	250 psi	500 psi	750 psi	0.580
4"	0.130"	200 psi	400 psi	600 psi	0.825
6"	0.130"	225 psi	450 psi	675 psi	1.375

*1-year warranty.

*Potable water approved: Yes

*Quality Management System Certification: ISO 9001:2015 Registration # 11-R1045