




SNAP-TITE ATX™

HIGH PRESSURE NITRILE RUBBER ATTACK/SUPPLY HOSE

Manufactured in a similar process as TPX™, ATX™ utilizes a 3-ply design where the cover and liner are extruded independently and double vulcanized to guarantee a consistent, compact hose wall. The polyester reinforcement can then be woven tighter, making this hose more resistant to puncture while also being easier to pack and store. ATX™ has a stronger jacket which increases the service test pressure of the LDH sizes to 300 psi (2068 kpa).

FEATURES

- 3-ply rubber municipal fire hose with both the cover and liner made of heavy duty nitrile rubber, high tensile strength tightly woven polyester reinforcement for maximum durability and flexibility.
- Smooth liner keeps friction loss to a minimum for greater flow.
- Nitrile rubber cover greatly increases abrasion resistance, provides long service life, and the tightly woven reinforced jacket resists punctures.
- Remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone, oxidation, and most chemicals and petrochemicals.
- Engineered to meet the requirements of high pressure applications. Designed for relay pumping, pressurizing standpipes, and sprinkler systems.
- Manufactured in accordance with NFPA 1960 standard, latest edition within our ISO-9001:2015 certified quality assurance system.



HOSE COLORS

Yellow



ATTACK



SUPPLY




USA MADE



SNAP-TITE ATX™

HIGH PRESSURE NITRILE RUBBER ATTACK/SUPPLY HOSE

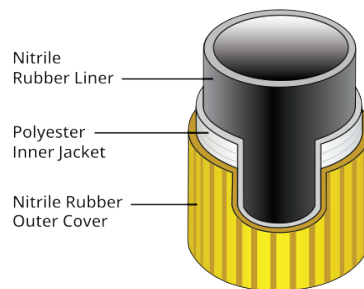

HOSE COLORS

Yellow



*Additional colors available upon request.

TECHNICAL DATA & INFORMATION

Model	ATX™
Basic Construction	Heavy gauge 3-ply Nitrile rubber cover/liner with polyester inner jacket.
Application	Attack, Supply
Colors*:	Yellow
Temperature Range	-40° F - 200° F
Testing Pressures:	
Service	300 psi
Proof	600 psi
Burst	900 psi

SNAP-TITE ATX™

HIGH PRESSURE NITRILE RUBBER ATTACK/SUPPLY HOSE

TECHNICAL DATA & INFORMATION										
NOMINAL SIZE	INTERNAL/OUTSIDE DIAMETER				WEIGHT					
	Dry ID	Charged ID at 50 psi	Charged ID at 150 psi	Charged OD at 150 psi	Water Pickup Weight*	Dry (lbs./50' coupled)	Charged at 50 psi (lbs./50' coupled)	# of Gallons/50'	Charged at 150 psi (lbs./50' coupled)	# of Gallons/50'
4"	4.12"	-	-	-	0 LBS	68 LBS	-	-	-	-
5"	5.11"	-	-	-	0 LBS	89 LBS	-	-	-	-
6"	6.06"	-	-	-	0 LBS	98 LBS	-	-	-	-

TECHNICAL DATA & INFORMATION									
NOMINAL SIZE	DOORWAY KINK	ABRASION RESISTANCE	HEAT RESISTANT TESTING (CONDUCTIVE)		HEAT RESISTANT TESTING (RADIANT)		PACKABILITY		
			Average Time to 20 psi Drop	Average GPM Loss	Average Time to 20 psi Drop	Average GPM Loss	Flat Width	Edge Thickness	180° Bend Thickness
4"	-	# of Taber Abrasion Cycles (H-22 wheel) 35,000	-	-	-	-	6.50"	.80"	1.80"
5"	-	33,667	-	-	-	-	8.25"	.85"	2.10"
6"	-	28,833	-	-	-	-	9.50"	1.10"	2.20"

*1-year warranty.

*MIL Std 24606 used for water pickup weight.

*Potable water approved: No

*Quality Management System Certification: ISO 9001:2015 Registration # 11-R1045