



SUPREME™


PREMIUM HOSE. OUTSTANDING VALUE.

Supreme is a durable, rugged, traditional double jacketed fire hose and one of the best values on the market today. Originally designed over 40 years ago, Supreme has become the hose to which all others are compared. With hose sizes up to 3" and manufactured to exacting standards, our use of ring-spun polyester yarn with a flexible rubber liner and calendered rubber backing, keeps this hose supple when empty and tough when necessary.

FEATURES


- Calendar-backed, double jacketed EPDM rubber lined fire hose made from 100% high tensile strength polyester yarn.
- Liner is attached to the inner jacket using a vulcanized rubber calendar backing that mechanically and chemically bonds the EPDM rubber lining to the inside jacket without the use of glues, and provides the assurance that the lining will not delaminate.
- Optional Dura-Cote™ treatment.
- Remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone and oxidation.
- Optional color-coded stripe of one contrasting color can be woven into the outer jacket running the entire length of the hose for identification purposes.
- Kink resistance exceeds that of lightweight jacketed hose.
- Suitable for use with CAFS and foam solutions.
- Manufactured in accordance with NFPA 1960 Standard, the latest edition within our ISO-9001:2015 certified quality assurance system.

HOSE COLORS



SUPREME™

PREMIUM HOSE. OUTSTANDING VALUE.

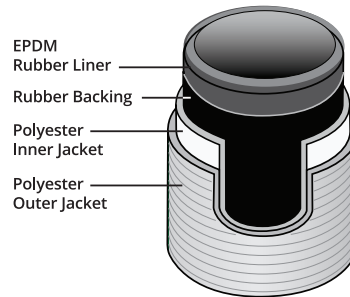

HOSE COLORS



STRIPE COLORS



Snap-tite Hose Technical Data & Information	
Model	Supreme
Basic Construction	Polyester outer/inner jacket, EPDM rubber liner with calender rubber backing.
Application	Attack, CAFS
Colors:	Yellow, Red, Blue, Orange, Green, White (coated), White (uncoated)
Stripe Colors:	Yellow, Red, Blue, Black, Green
Temperature Range	-40° F - 150° F
Testing Pressures:	
Service	400 psi
Proof	800 psi
Burst	1200 psi

SUPREME™

PREMIUM HOSE. OUTSTANDING VALUE.

TECHNICAL DATA & INFORMATION										
NOMINAL SIZE	INTERNAL/OUTSIDE DIAMETER				WEIGHT					
	Dry ID	Charged ID at 50 psi	Charged ID at 150 psi	Charged OD at 150 psi	Water Pickup Weight*	Dry (lbs./50' coupled)	Charged at 50 psi (lbs./50' coupled)	# of Gallons/50'	Charged at 150 psi (lbs./50' coupled)	# of Gallons/50'
1-1/2"	1.625"	1.650	1.655	1.994	3.4 LBS	21	67.07	5.55	67.38	5.59
1-3/4"	1.879"	1.931	1.939	2.233	4.2 LBS	25	88	7.6	89	7.66
2"	2.160"	2.207	2.232	2.525	4.6 LBS	28	110.46	9.93	112.34	10.16
2-1/2"	2.714"	2.78	2.825	3.125	5.6 LBS	35	165.75	15.75	170.04	16.27
3"	3.2"	-	-	-	-	37.07	-	-	-	-

TECHNICAL DATA & INFORMATION									
NOMINAL SIZE	DOORWAY KINK	ABRASION RESISTANCE	HEAT RESISTANT TESTING (CONDUCTIVE)		HEAT RESISTANT TESTING (RADIANT)		PACKABILITY		
		# of Taber Abrasion Cycles (H-22 wheel)	Average Time to 20 psi Drop	Average GPM Loss	Average Time to 20 psi Drop	Average GPM Loss	Flat Width	Edge Thickness	180° Bend Thickness
1-1/2"	24" / 75psi	37,000+	Available upon Request				2.79"	.58"	.92"
1-3/4"	30" / 75psi	37,000+	1 M /12 S (Red)	1 GPM	2 M / 58 S (Red)	1 GPM	3.11"	.4395"	.9305"
2"	30" / 75psi	37,000+	Available upon Request				3.54"	.58"	.937"
2-1/2"	30" / 75psi	37,000+	11.63 Seconds	1 GPM	2 M / 47 S (Red)	2 GPM	4.45"	.417"	.871"
3"	Avail. upon Request	37,000+	Available upon Request				Available upon Request		

*10-year warranty.

*MIL Std 24606 used for water pickup weight.

*Potable water approved: No

*Quality Management System Certification: ISO 9001:2015 Registration # 11-R1045