




WARRIOR FW & FWN

PROPRIETARY DOUBLE JACKETED HOSE

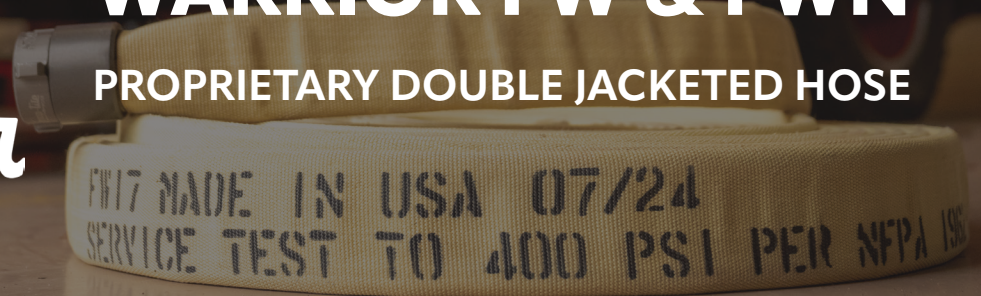


The Warrior hose is a revolutionary attack hose built to conquer the heat of modern fires. Independent lab tests prove the Warrior can withstand extreme heat for extended periods. But it's not just about survival; the Warrior delivers exceptional water flow, kink resistance, and handling – even under pressure. This translates to a hose that performs exceptionally well, even in the harshest environments. Equipping firefighters with the Warrior, is helping to increase firefighter and civilian survivability in fires. The Warrior sets a new standard for high-temperature attack hoses, proving itself to be in a class of its own.

Neither the para-aramid fiber nor the inner lining of the Warrior hose contains PFAS (per-and-polyfluoroalkyl substances).

FEATURES

- 60 minutes of radiant testing at 30 kw/m² of heat flux without failure.
- More than three times the abrasion resistance of any current hose on the market.
- Excellent handling, kink resistance, and flow at the nozzle at pressures of 45 psi to 100 psi.
- Optional Dura-Cote™ treatment.
- Remains flexible to temperatures as low as -40°F (-40°C) and is resistant to ozone, oxidation, and most chemicals and petrochemicals.
- Manufactured in accordance with NFPA 1960 standard, latest edition within our ISO-9001:2015 certified quality assurance system.
- An attack line designed with a 1.77" and 1.88" ID waterway.

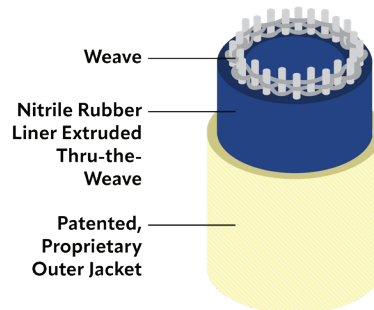


HOSE COLORS*



WARRIOR FW & FWN

PROPRIETARY DOUBLE JACKETED HOSE

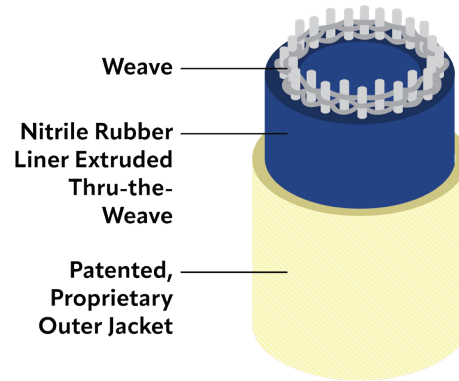

HOSE COLORS*



*Please note: color will transfer and fade with use.

TECHNICAL DATA & INFORMATION	
Model	Warrior (FW & FWN)
Basic Construction	Proprietary para aramid outer jacket material, thru-the-weave nitrile rubber liner.
Application	Attack, Low PSI, CAFS
Colors:	Natural, Yellow, Red, Orange, Green, Blue
Temperature Range	-40° F - 200° F
Testing Pressures:	
Service	400 psi
Proof	800 psi
Burst	1200 psi

WARRIOR FW

PROPRIETARY DOUBLE JACKETED HOSE

TECHNICAL DATA & INFORMATION										
NOMINAL SIZE	INTERNAL/OUTSIDE DIAMETER				WEIGHT					
	Dry ID	Charged ID at 50 psi	Charged ID at 150 psi	Charged OD at 150 psi	Water Pickup Weight*	Dry (lbs./50' coupled)	Charged at 50 psi (lbs./50' coupled)	# of Gallons/50'	Charged at 150 psi (lbs./50' coupled)	# of Gallons/50'
1-1/2"	-	Pending	Pending	Pending	Pending	Pending	Pending	Pending	Pending	Pending
1-3/4"	1.893"	2.059	2.0835	2.3145	3.6 LBS	22	93.77	8.64	95.46	8.85
2-1/2"	2.518"	2.762	2.788	3.044	5.6 LBS	36	165.09	15.55	167.53	15.84

TECHNICAL DATA & INFORMATION									
NOMINAL SIZE	DOORWAY KINK	ABRASION RESISTANCE	HEAT RESISTANT TESTING (CONDUCTIVE)		HEAT RESISTANT TESTING (RADIANT)		PACKABILITY		
			Average Time to 20 psi Drop	Average GPM Loss	Average Time to 20 psi Drop	Average GPM Loss	Flat Width	Edge Thickness	180° Bend Thickness
1-1/2"	24" / 50psi	# of Taber Abrasion Cycles (H-22 wheel) 91,000+	15 minutes	No leakage	60 minutes	No leakage	Pending	Pending	Pending
1-3/4"	24" / 50psi	91,000+	15 minutes	No leakage	60 minutes	No leakage	3.11"	.589"	.743"
2-1/2"	24" / 50psi	91,000+	15 minutes	No leakage	60 minutes	No leakage	4.33"	.60"	1.0"

*10-year warranty, 3-year all hazard warranty.

*MIL Std 24606 used for water pickup weight.

*1-3/4" and 2-1/2" are UL/ULC Pending.

*Potable water approved: No

*Quality Management System Certification: ISO 9001:2015 Registration # 11-R1045

WARRIOR FWN

PROPRIETARY DOUBLE JACKETED HOSE

TECHNICAL DATA & INFORMATION										
NOMINAL SIZE	INTERNAL/OUTSIDE DIAMETER				WEIGHT					
	Dry ID	Charged ID at 50 psi	Charged ID at 150 psi	Charged OD at 150 psi	Water Pickup Weight*	Dry (lbs./50' coupled)	Charged at 50 psi (lbs./50' coupled)	# of Gallons/50'	Charged at 150 psi (lbs./50' coupled)	# of Gallons/50'
1-3/4"	1.77"	1.9515	1.9815	2.212	3 LBS	21	85.44	7.7645	87.44	8.001

TECHNICAL DATA & INFORMATION									
NOMINAL SIZE	DOORWAY KINK	ABRASION RESISTANCE	HEAT RESISTANT TESTING (CONDUCTIVE)		HEAT RESISTANT TESTING (RADIANT)		PACKABILITY		
		# of Taber Abrasion Cycles (H-22 wheel)	Average Time to 20 psi Drop	Average GPM Loss	Average Time to 20 psi Drop	Average GPM Loss	Flat Width	Edge Thickness	180° Bend Thickness
1-3/4"	24" / 50psi	91,000+	15 minutes	No leakage	60 minutes	No leakage	3.14"	.645"	1.343"

*10-year warranty, 3-year all hazard warranty.

*MIL Std 24606 used for water pickup weight.

*Potable water approved: No

*Quality Management System Certification: ISO 9001:2015 Registration # 11-R1045