


5P

POLYESTER SINGLE JACKET EPDM RUBBER LINED HOSE



The super-duty 5P is an excellent all-around performer: Strong, flexible, and ideally suited for all exterior and interior firefighting applications. It delivers medium pressure and high-end performance at a value price point.

5P is a polyester single jacket hose with a rugged Ethylene Propylene Diene Monomer (EPDM) rubber liner that can handle most fluids including some chemicals and petroleum-based products. It boasts a maximum operating pressure of 225 psi (1550 kPa) and can be enhanced with optional Dura-Cote treatment for a higher level of abrasion resistance while preventing water pick-up.

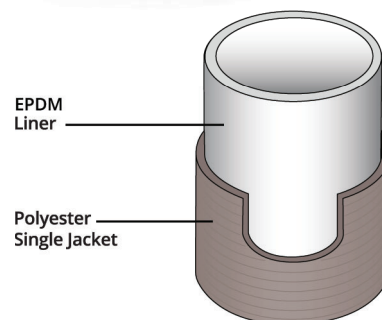

CONSTRUCTION

Polyester Single Jacket EPDM Rubber Inner Liner

COATING

Optional Dura-Cote

TEMPERATURE RANGE

-40°F to 150°F (-40°C to 66°C)

COUPLINGS

Aluminum or Brass NH/NST, IPT Threaded

COLORS



WOVEN SINGLE JACKET

SIZE	SERVICE PRESSURE	WORKING PRESSURE	BURST PRESSURE	WEIGHT (FOR FT UNCOUPLED)	FLAT WIDTH	CERTIFICATION AVAILABLE
IN	PSI (kPa)	PSI (kPa)	PSI (kPa)	LBS (KG)	IN	
1 ½"	250 (1723)	250 (1723)	750 (5171)	0.19 (0.09)	1.61"	UL, ULC, FM
2"	250 (1723)	250 (1723)	750 (5171)	0.30 (0.14)	2.16"	
2 ½"	250 (1723)	250 (1723)	750 (5171)	0.33 (0.15)	2.53"	UL, ULC, FM
3"	250 (1723)	250 (1723)	750 (5171)	0.50 (0.23)	3.10"	

HOW TO ORDER

TYPE	HOSE I.D.	HOSE LENGTH	COLOR	COUPLING SIZE	THREAD TYPE	COUPLING MATERIAL
5P	15 = 1 ½" 20 = 2" 25 = 2 ½" 30 = 3"	50 = 50' 100 = 100'	Y = Yellow R = Red W = White (uncoated)	15 = 1 ½" 20 = 2" 25 = 2 ½" 30 = 3"	N = NH I = IPT	Blank = Aluminum BR = Brass Rocker Lug BP = Brass Pin Lug



UPDATED 03/08/22
www.snaptitehose.com
 814-438-7616