

# SNAP-TITE UTX

## EXTRA MUSCLE IN FLOW AND SUPPORT




UTX LDH gives you extra muscle, in flow and support—all in a high-visibility lightweight supply line. A tough polyurethane outer cover combines with an exclusive thru-the-weave liner to offer greater resistance to punctures and abrasion. But it doesn't stop there. UTX is compact, taking up less room when you pack it, and it's extremely durable—with higher resistance to oils, chemicals and ozone. UTX is snag proof and kink resistant and will not mildew or rot.

### FEATURES AND BENEFITS

Typical rubber extruded fire hose can vary in thickness, becoming bulky and heavy. UTX LDH incorporates a circular woven polyester jacket that is completely encapsulated by a special urethane polymer that provides superior abrasion and puncture resistance while remaining extremely light and service worthy.

- UTX weighs 20% less than conventional rubber supply hose.
- Reinforced woven polyester jacket provides increased puncture resistance.
- Extruded thru-the-weave polyurethane construction and ultra smooth liner minimizes friction loss.
- Engineered to deliver more flow and more efficient packability.
- Remains flexible to -50°F (-46°C).
- Resists ozone, oxidation and most chemical/petroleum products.
- Manufactured in accordance with NFPA 1961 Standard, latest edition.
- Made in USA to ISO-9001:2015 certified quality management system.

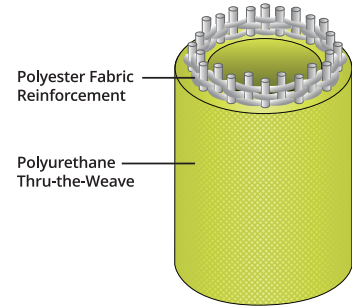

### CONSTRUCTION

Extruded Thru-the-Weave Polyurethane

### TEMPERATURE RANGE

-50°F to 160°F (-46°C to 71°C)

### COUPLINGS

Aluminum NH/NST or IPT Threaded & Aluminum Vic-groove or Storz

### COLORS



### HOSE SIZING AND SPECIFICATIONS

SIZE	SERVICE PRESURE	WORKING PRESSURE	BURST PRESSURE	WEIGHT (PER FT UNCOUPLED)	FLAT WIDTH
IN	PSI (kPa)	PSI (kPa)	PSI (kPa)	LBS (KG)	IN
4"	200 (1379)	200 (1379)	600 (4137)	0.65 (0.29)	6.25"
5"	200 (1379)	200 (1379)	600 (4137)	0.83 (0.38)	7.75"

### HOW TO ORDER

TYPE	HOSE ID	BY	HOSE LENGTH	COLOR	COUPLING SIZE	THREAD TYPE	COUPLING MATERIAL
UTX	40 = 4" 50 = 5"	X	50 = 50' 100 = 100'	G = Hi-Viz Green O = Blaze Orange R = Red Y = Yellow B = Blue	40 = 4" 50 = 5"	N = NH I = IPT S = Storz V = Vic-groove	Blank = Aluminum

POLYURETHANE



UPDATED 03/08/22  
[www.snaptitehose.com](http://www.snaptitehose.com)  
 814-438-7616