

6T


POLYESTER DOUBLE JACKET HOSE



This double jacket municipal grade fire hose incorporates a lightweight polyurethane liner that meets all the requirements of NFPA 1961 and Mil Std. 24606. It is designed for use as an attack hand line hose and can be used for potable water transfer in an emergency

FEATURES

- High quality, double jacket, municipal fire hose made from 100% high tensile strength polyester yarn along with a lining of thermoplastic polyurethane for reduced weight while remaining kink resistant.
- Optional Dura-Cote protective treatment greatly increases abrasion, heat, flame and petrochemical resistance while virtually eliminating water pick-up. When treated 6T is protected from mildew and no drying is required.
- Hose remains flexible to temperatures as low as -40°F (-40°C) to 150° F (65°C)
- Designed to meet all NFPA requirements for ozone resistance.
- NSF Standard 61 approved lining.
- Designed for maximum service life.
- Couplings meet or exceed NFPA 1963 (latest edition).
- Manufactured within our ISO-9001 certified quality assurance system.

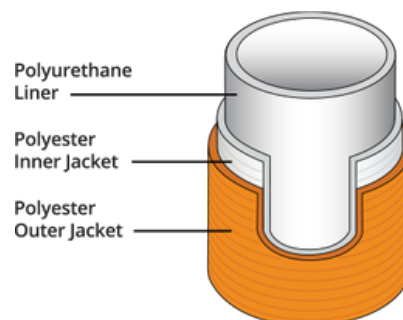

CONSTRUCTION

Polyester Double Jacket
Polyurethane Inner Liner

TEMPERATURE RANGE

-40°F (-40°C) to 150° F (65°C)

COLORS



Size	Service Test PSI (kPa)	Proof Test PSI (kPa)	Burst PSI (kPa)	Weight 50' (coupled) Lbs. (KG)	Flat Width (in)	Bowl Size
1 1/2"	300 (2069)	600 (4137)	900 (6205)	14 (6.4)	2.80	1-15/16
1 3/4"	300 (2069)	600 (4137)	900 (6205)	16 (7.3)	3.20	2-3/16
2 1/2"	300 (2069)	600 (4137)	900 (6205)	25 (11.3)	4.50	3
3"	300 (2069)	600 (4137)	900 (6205)	36 (16.3)	5.25	3-17/32
4"	300 (2069)	600 (4137)	900 (6205)	50 (22.7)	6.90	4-17/32