


XH SUPPLY HOSE

LAYFLAT NITRILE RUBBER HOSE



The Supply Hose is manufactured out of 100% high tenacity yarn, extruded thru-the-weave nitrile rubber construction. This means a hose manufactured to be durable and resistant to chemicals, ozone, abrasion, and puncture. This supply hose is also manufactured to have a wide temperature range.

This hose is designed to move slurry quickly and efficiently all while giving you the reliability you require to get the job done.

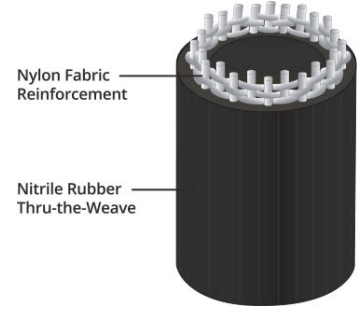

FEATURES AND BENEFITS

- 100% high tenacity yarn, extruded with thru-the-weave nitrile rubber construction.
- Nitrile rubber cover increases resistance to oil, fuel, most chemicals and petrochemicals.
- Nitrile rubber cover resistant to ozone and oxidation.
- Ideal for slurry supply lines and irrigation applications.
- Nitrile rubber cover greatly increases abrasion resistance.
- Tightly woven polyester reinforcement resists punctures.
- Temperature range -20°F (-29°C) to 200°F (93°C).
- Designed for maximum durability, flexibility, and service life.
- Easy to store and transport.

CONSTRUCTION

100% High Tenacity Yarn, extruded thru-the-weave Nitrile Rubber

TEMPERATURE

-20°F to 200°F (-29°C to 93°C)

COLORS

Black



NITRILE RUBBER

HOSE SIZING AND SPECIFICATIONS

PART NUMBER	SIZE	SERVICE PRESSURE	WORKING PRESSURE	BURST PRESSURE	WEIGHT	FLAT WIDTH
	IN	PSI (kPa)	PSI (kPa)	PSI (kPa)	LBS (KG)	IN
XH40X660Y	4"	300 (2068)	300 (2068)	750 (5171)	0.66 (0.30)	6.50"
XH50X660Y	5"	260 (1793)	260 (1793)	650 (4482)	0.70 (0.32)	7.88"
XH60X660Y	6"	300 (2068)	300 (2068)	750 (5171)	1.11 (0.50)	8.00"

HOW TO ORDER

TYPE	HOSE I.D.	HOSE LENGTH	COLOR
XH	40 = 4" 50 = 5" 60 = 6"	100 = 100' 660 = 660'	K = Black



UPDATED 03/08/22
www.snaptitehose.com
 814-438-7616