




CONQUEST

POLYESTER DOUBLE JACKETED ATTACK HOSE

Looking for a hose to flow a tremendous amount of water? You've found it with CONQUEST! Today's fires are hotter and more water is needed at the nozzle to knock them down fast. Conquest meets that challenge every day. Our patented thru-the-weave extruded polyurethane liner has an incredibly smooth surface that enhances water flow.

FEATURES

- Patented double jacketed fire hose made from 100% high tensile strength polyester outer jacket with extruded thru-the-weave polyurethane inner hose. NO ADHESIVE IS USED. The lining will never delaminate.
- Optional Dura-Cote™ treatment.
- Hose remains flexible at temperatures as low as -40°F (-40°C) and meets all NFPA requirements for ozone resistance.
- Outstanding flow and low friction loss.
- Suitable for CAFS and foam concentrates.
- Optional color-coded stripe of one contrasting color can be woven into the outer jacket running the full length of the hose for identification purposes.
- Manufactured in accordance with NFPA 1960 standard, latest edition within our ISO-9001:2015 certified quality assurance system.

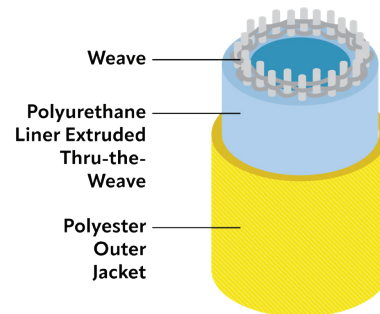


HOSE COLORS



CONQUEST

POLYESTER DOUBLE JACKET ATTACK HOSE

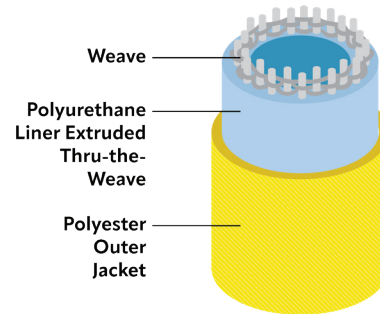

HOSE COLORS



STRIPE COLORS



Snap-tite Hose Technical Data & Information	
Model	Conquest
Basic Construction	Polyester outer jacket, extruded thru-the-weave polyurethane liner.
Application	Attack, CAFS, Potable Water
Colors:	Yellow, Red, Blue, Orange, Green, White (coated), White (uncoated)
Striped Colors:	Yellow, Red, Blue, Black, Green
Temperature Range	-40° F - 150° F

Tesing Pressures			
Nominal Size	Service	Proof	Burst
1-3/4"	400 psi	800 psi	1200 psi
2"	400 psi	800 psi	1200 psi
2-1/2"	400 psi	800 psi	1200 psi
3"	300 psi	600 psi	900 psi

CONQUEST

POLYESTER DOUBLE JACKET ATTACK HOSE

TECHNICAL DATA & INFORMATION										
NOMINAL SIZE	INTERNAL/OUTSIDE DIAMETER				WEIGHT					
	Dry ID	Charged ID at 50 psi	Charged ID at 150 psi	Charged OD at 150 psi	Water Pickup Weight*	Dry (lbs./50' coupled)	Charged at 50 psi (lbs./50' coupled)	# of Gallons/50'	Charged at 150 psi (lbs./50' coupled)	# of Gallons/50'
1-3/4"	1.832"	1.952	1.987	2.500	2.8 LBS	19	84.14	7.85	85.81	8.05
2"	2.007"	2.068	2.143	2.425	3.4 LBS	22	94.4	8.72	99.75	9.36
2-1/2"	2.512"	2.647	2.706	3.025	3.4 LBS	29	147.56	14.28	152.91	14.93
3"	3.086"	-	-	-	Avail. upon Request	35	-	-	-	-

TECHNICAL DATA & INFORMATION					
NOMINAL SIZE	DOORWAY KINK	ABRASION RESISTANCE	PACKABILITY		
			# of Taber Abrasion Cycles (H-22 wheel)	Flat Width	Edge Thickness
1-3/4"	30" / 50psi	38,500+	3.14"	.61"	.883"
2"	30" / 100ps	38,500+	3.38"	.75"	.99"
2-1/2"	36 / 75psi	38,500+	4.33"	.47"	.85"
3"	-	38,500+	5.11"	.955"	1.817"

CONQUEST

POLYESTER DOUBLE JACKET ATTACK HOSE

TECHNICAL DATA & INFORMATION										
NOMINAL SIZE	RADIANT HEAT TEST RESULTS					CONDUCTIVE HEAT TEST RESULTS				
	Radiant Heat Exposure	Exposure Duration*	Average Leakage Rate at 150 psi	Max Leakage Rate at 150 psi	UL 19 Heat Resistance Type	Conductive Heat Exposure	Exposure Duration*	Average Leakage Rate at 150 psi	Max Leakage Rate at 150 psi	UL 19 Heat Resistance Type
1-3/4"	30 kw/m2	1 M / 21 S (Red / Yellow Stripe)	.28 GPM	.05 GPM	-	Steel block at 752°F	14 Seconds	7.55 GPM	10.65 GPM	-
		1 M / 23 S (Yellow / Black Stripe)	.3 GPM	.35 GPM						
2"	30 kw/m2	Available upon Request			-	Steel block at 752°F	Available upon Request			-
2-1/2"	30 kw/m2	2 M / 9 S (Red / Yellow Stripe)	.3 GPM	.55 GPM	-	Steel block at 752°F	16.33 Seconds	5.78 GPM	15.15 GPM	-
		2 M / 9 S (Yellow / Black Stripe)								
3"	30 kw/m2	Available upon Request			-	Steel block at 752°F	Available upon Request			-

*The results from the radiant heat test are based on controlled laboratory testing and do not represent actual conditions encountered during firefighting. These results are intended to be used as a baseline for hose comparison purposes only and are not indicative of specific field performance. Several factors can influence hose performance relative to radiant heat, please see Guidance for Lined Fire Hose and Hose Assemblies, UL 19G for further information on these results.

*The results from the conductive heat test are based on controlled laboratory testing and do not represent actual conditions encountered during firefighting. These results are intended to be used as a baseline for hose comparison purposes only and are not indicative of specific field performance. Several factors can influence hose performance relative to conductive heat, please see Guidance for Lined Fire Hose and Hose Assemblies, UL 19G for further information on these results.

*10-year warranty, 2-year all hazard warranty.

*MIL Std 24606 used for water pickup weight.

*1-3/4" and 2-1/2" are UL/ULC Certified.

*Potable water approved: Yes

*Quality Management System Certification: ISO 9001:2015 Registration # 11-R1045